


GLB-4110



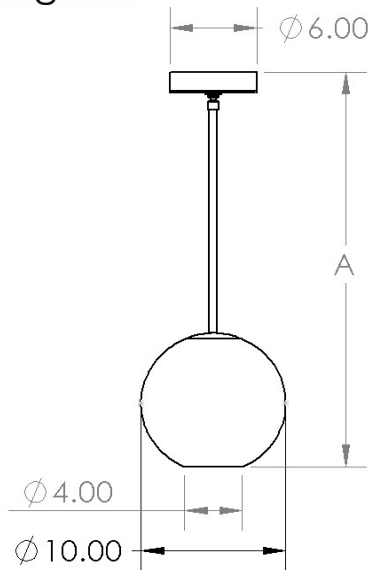

Specifications:

Description: 10" acrylic globe pendant.

Globe Material: White opal acrylic.

Light Source: LED or medium base lampholder.

Dimming: 0-10v, ELV and TRIAC dimming to 10% is standard.

Electrical: Medium base 120v only. LED is 120-277, voltage.

Suspension: 1/2" rigid stem mounting or chain mounting. Canopy mounts to standard 4" octagonal J-box.

Options: 30° swivel canopy. Integral or remote LED emergency driver. Remote driver box is 18"(L) x 6"(W) x 3"(H), for dry locations.

Modification: CONSULT FACTORY FOR MODIFICATION OF THIS PRODUCT.

Finish: Choose from a selection of standard powder coat finishes, metal finishes or specify custom finishes.

Certification: ETL listed for indoor dry locations.



Catalog Number:

GLB-4110						
Model	Height (A)	Mounting	Light Source	Finish	CCT	Options
GLB-4110	18" - 120"	ST - Stem CH - Chain	MB - Medium Base (60-Watt Max) 7W - LED 800 Lumens 10W - LED 1200 Lumens 13W - LED 2000 Lumens	GW, MW, GB, MB, TB, SR, BZ, GO, GY, CC	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	SC - Swivel Canopy ELI - Integral Emergency Driver ELR - Remote LED Emergency Driver
				ORB, PA, BR, SA, PN, BN, SN, PB, BB, SB		

Powder Coat Finishes			Metal Finishes		
GW - Gloss White	TB - Textured Black	GO - Gold	ORB - Oil Rubbed Bronze	PN - Polished Nickel	PB - Polished Brass
MW - Matte White	SR - Silver	GY - Gray	PA - Polished Aluminum	BN - Brushed Nickel	BB - Brushed Brass
GB - Gloss Black	BZ - Bronze	CC - Custom Color	BR - Brushed Aluminum	SN - Satin Nickel	SB - Satin Brass
MB - Matte Black			SA - Satin Aluminum		

08012021